



There's only one #1™

Project _____
Item # _____
Quantity _____



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Ideal for pass-through areas, buffet lines or as a heated work shelf.

Standard features

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm)
- Extruded aluminum base with stainless steel top (optional hardcoated aluminum surface)
- Standard legs:
Units 30" (762 mm) wide and under: 1" (25 mm) legs
Units 36" (914 mm) or wider: 4" (102 mm) legs
- All models include a 72" (1829 mm) cord and plug attached



Options (available at time of purchase only)

Designer Color (top surface not painted) – Clear Anodized Standard [†]

- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

Hardcoated Surface in lieu of Stainless Steel on Standard 19.5" (495 mm) deep "I" units - please consult factory for other depths

- ☐ GRS-18 through GRS-42 ☐ GRS-48 through GRS-72

☐ Thermostat Guard

Accessories

- ☐ 4" (102 mm) adjustable Legs (Standard on GRS-36 units and larger)
☐ Slant Leg Kit for models 12" (305 mm) deep or deeper

Pan Rail for 19.5" (495 mm) models only

- ☐ 2-Pan ☐ 3-Pan ☐ 4-Pan ☐ 5-Pan

☐ ThruShelf Kit – Bolt and fender washer leg accessory kit for attaching one GRS unit to a wire rack shelf

[†]Non-standard colors are non-returnable



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)


[Patents](#)

[Chat](#)



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

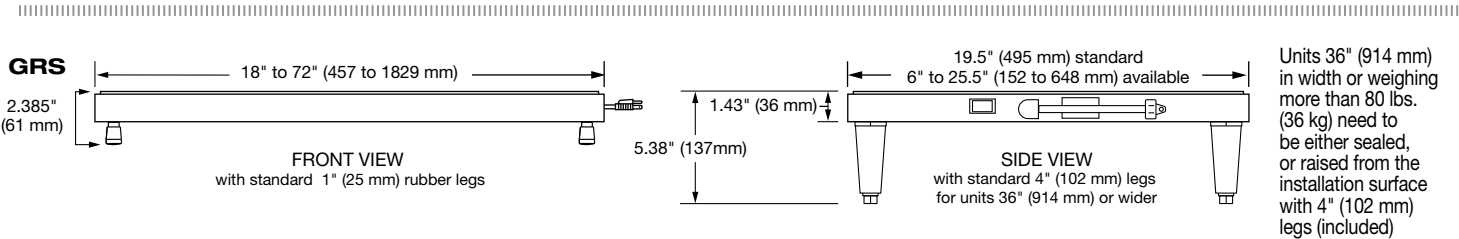

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

♦ NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.

Pan Capacity

Accommodates 12" x 20" (305 x 508 mm) steam table pans

Model	Capacity	Model	Capacity
GRS-18-I	1 pan	GRS-48-I	3 pans
GRS-24-I	1 pan	GRS-54-I	4 pans
GRS-30-I	2 pans	GRS-60 -I	4 pans
GRS-36-I	2 pans	GRS-66-I	5 pans
GRS-42-I	3 pans	GRS-72-I	5 pans





Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models


25.5" (648 mm) DEPTH (L)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-L	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-24-L	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	475	4.0	NEMA 5-15P	26 lbs (12 kg)
		220	435	2.0	CEE 7/7 Schuko	
		240	517	2.2	BS-1363	
		220-230 (CE)	435-475	2.0-2.1	CEE 7/7 Schuko	
		230-240 (CE)	475-517	2.1-2.2	BS-1363	
GRS-30-L	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	600	5.0	NEMA 5-15P	33 lbs (15 kg)
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-36-L*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	725	6.0	NEMA 5-15P	37 lbs (17 kg)
		220	663	3.0	CEE 7/7 Schuko	
		240	789	3.3	BS-1363	
		220-230 (CE)	663-725	3.0-3.2	CEE 7/7 Schuko	
		230-240 (CE)	725-789	3.2-3.3	BS-1363	
GRS-42-L*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	825	6.9	NEMA 5-15P	43 lbs (20 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	898	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-898	3.6-3.7	BS-1363	
GRS-48-L*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	950	7.9	NEMA 5-15P	50 lbs (23 kg)
		220	869	4.0	CEE 7/7 Schuko	
		240	1034	4.3	BS-1363	
		220-230 (CE)	869-950	4.0-4.1	CEE 7/7 Schuko	
		230-240 (CE)	950-1034	4.1-4.3	BS-1363	
GRS-54-L*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	1075	9.0	NEMA 5-15P	58 lbs (27 kg)
		220	984	4.5	CEE 7/7 Schuko	
		240	1171	4.9	BS-1363	
		220-230 (CE)	984-1075	4.5-4.7	CEE 7/7 Schuko	
		230-240 (CE)	1075-1171	4.7-4.9	BS-1363	
GRS-60-L*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	1200	10.0	NEMA 5-15P	60 lbs (28 kg)
		220	1098	5.0	CEE 7/7 Schuko	
		240	1307	5.4	BS-1363	
		220-230 (CE)	1098-1200	5.0-5.2	CEE 7/7 Schuko	
		230-240 (CE)	1200-1307	5.2-5.4	BS-1363	
GRS-66-L*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	1325	11.0	NEMA 5-15P	65 lbs (30 kg)
		220	1212	5.5	CEE 7/7 Schuko	
		240	1443	6.0	BS-1363	
		220-230 (CE)	1212-1325	5.5-5.8	CEE 7/7 Schuko	
		230-240 (CE)	1325-1443	5.8-6.0	BS-1363	
GRS-72-L*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	1450	12.0	NEMA 5-15P	69 lbs (32 kg)
		220	1327	6.0	CEE 7/7 Schuko	
		240	1579	6.6	BS-1363	
		220-230 (CE)	1327-1450	6.0-6.3	CEE 7/7 Schuko	
		230-240 (CE)	1450-1579	6.3-6.6	BS-1363	

CORD LOCATION

Center of side with controls.

PLUG CONFIGURATIONS

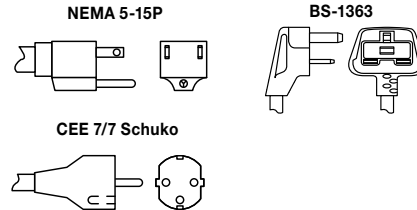

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

PRODUCT SPECS Glo-Ray® Heated Shelves

The Heated Shelf shall be a Glo-Ray®... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Options shall include anti-microbial *Designer Color* frame, Hardcoat surface and Thermostat Guard. Accessories shall include 4" (102 mm) adjustable legs, slant leg kit, pan rail and ThruShelf kit.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com

support@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)